

21" Color Monitor

SMC-210A



Features

- 21" CRT, 0.7mm stripe pitch, 90° deflection
- 450 TV lines of horizontal resolution
- 3 input video line, loop through, 75 Ω auto termination
- S-video input/output
- Maximum 1.0W speaker output
- World wide multiple system(NTSC/PAL)
- Beam current feedback circuit for color balance stability
- Digital Comb filter internal
- Metal cabinet
- Menu control(On screen display)

Video Security Systems


SMC-210A

Specifications

MODEL	SMC-210A	
Picture Tube	53cm(21"), 0.71mm Stripe type, In line gun, 90° Deflection	
Horizontal Resolution	More than 450 TV Lines	
Input Signal A/B	1Vp-p, 75ohm, Loop thru, Automatic 75ohm termination	
Input Signal C	S-VHS Jack, 1Vp-p(Y), 0.286Vp-p(C), Automatic 75ohm termination	
Video	Input	A,B : BNC, C : S-VHS
	Output	A,B : BNC, C : S-VHS
Audio	Input	3 RCA, Line level 300mV, 47Kohm(Hi-Impeadance)
	Output	3 RCA, 1W
Subcarrier Frequency Sync. Range	3.579545MHz ± 500Hz(room temperature)	
Horizontal Frequency Stability	15.75KHz ± 500Hz	
Vertical Frequency Stability	60Hz ± 4Hz	
Miss Convergence	0.5mm Max(Center)	
Operating Temperature	-10 ~ +50	
Operating Humidity	0% ~ 90%	
Power Requirement	AC100~240V,50/60Hz	
Power Consumption	70W	
Weight	Approx. 25.0Kg	
Dimensions(W x H x D)	490 x 444 x 482mm	



Dimensions

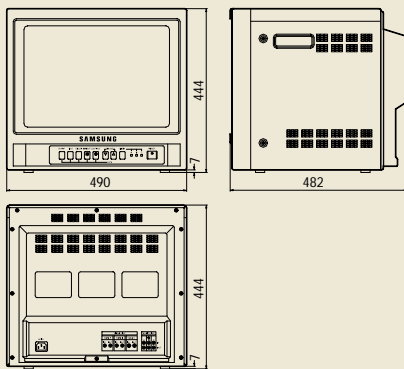

Copyright Korea QMS 1977
KQS 1988 Acquisition



ISO9001:1994
File No.: A8150



Samsung Headquarters

Samsung Electronics Co., Ltd.
416, Maetan-3Dong, Paldal-Gu
Suwon City, Kyungki-Do, Korea 442-742
TEL : 82-31-200-5443, 5730, 5913 FAX : 82-31-200-5594
<http://samsungelectronics.com/cctv>

Distributed by:

* Design and specifications are subject to change without notice.