

# 15" Line Monitor

## SMP-150A



### Features

- 15" CRT, 0.28mm Dot pitch, 90 °deflection
- 650 TV lines of horizontal resolution
- Looping through BNC connectors for 2 video input/output
- S-Video Input/Output
- Looping through RCA connectors for 3 audio input/output
- Maximum 1.0W speaker output
- Beam Current feedback circuit for color balance stability
- World wide multiple system(NTSC/PAL)
- Automation 75 termination
- Comb filter internal

# Video Security Systems


## SMP-150A

### Specifications

MODEL	SMP-150A	
Picture Tube	36cm(15") 0.28mm Dot type, In line gun,90° Deflection	
Horizontal Resolution	More than 650 Lines	
Input Signal A/B	1Vp-p , 75ohm, Loop thru, Automatic 75ohm termination	
Input Signal C	S-VHS Jack, 1Vp-p(Y), 0.286Vp-p(C), Automatic 75ohm termination	
Video	Input	A,B : BNC, C : S-VHS
	Output	A,B : BNC, C : S-VHS
Audio	Input	3 RCA, Line level 300mV , 47Kohm(Hi-Impeadance)
	Output	3 RCA, 1W
Subcarrier Frequency Sync. Range	3.579545MHz ± 500Hz(room temperature)	
Horizontal Frequency Stability	15.75KHz ± 500Hz	
Vertical Frequency Stability	60Hz ± 4Hz	
Miss Convergence	0.3mm Max(Center)	
Operating Temperature	-10 ~ +50	
Operating Humidity	0% ~ 90%	
Power Requirement	AC100~240V,50/60Hz	
Power Consumption	85W	
Weight	Approx. 13Kg	
Dimensions(W x H x D)	365 x 341 x 391mm	



### Dimensions

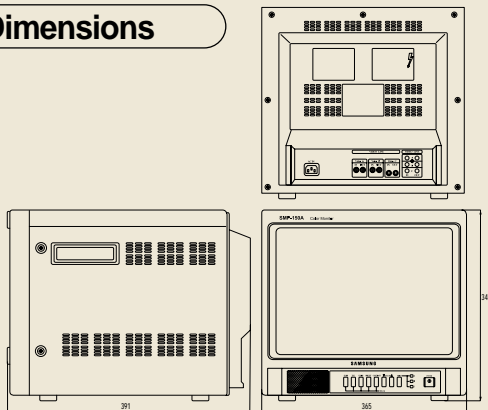

UL Registered  
UL 14491 Approval

ISO9001 : 1994  
File No. : AB150



#### Samsung Headquarters

Samsung Electronics Co., Ltd.  
416, Maetan-3Dong, Paldal-Gu  
Suwon City, Kyungki-Do, Korea 442-742  
TEL : 82-31-200-5443, 5730, 5913 FAX : 82-31-200-5594  
<http://samsungelectronics.com/cctv>

Distributed by:

\* Design and specifications are subject to change without notice.