



**26-Zone Burglary/Fire Control Panel**



**Description**

Setting the new standard in security/fire panels, the DMP XR20 Command Processor™ delivers more power and flexibility than any panel in its class. For demanding residential and commercial applications the XR20 provides ten on-board zones, one 2-wire smoke detector zone, access control capability, Pager Direct™ paging, 32 user codes, and daily opening and closing schedules.

The XR20 can be expanded to 26 zones by adding hardwire or 900 MHz wireless zones to meet the protection requirements of any mid-range residential or commercial installation.

**Communication**

The XR20 beats the competition with its ability to communicate using DMP Synchronous Data Link Control (SDLC) digital dialer, cellular, 4-2, CID, or Modem IIe reporting to one or two receivers. You can also use the Transmit Delay, Exit Error, Cross Zoning, and Abort Reports features for superior False Alarm Reduction.

**Area, All/Perim, or Home/Sleep/Away Arming**

The XR20 allows you to configure the system for Area arming with four separate areas, All/Perimeter arming with Perimeter and Interior areas, or Home/Sleep/Away arming with Perimeter, Interior, and Bedroom areas. Users can arm the Perimeter and Interior at night while leaving the Bedroom area disarmed.

**Premises Wireless**

The XR20 provides up to 16 zones of premise wireless protection by adding the Model FA426 Wireless Receiver. The FA426 accepts a wide assortment of 900 MHz wireless transmitters, PIRs, glassbreaks, and smoke detectors. Also add the Model 738A Ademco Wireless Interface Module to support 300MHz wireless products.

**Pager Direct™ Paging**


The XR20 can send Alarm, Trouble, Opening, Closing, and Check-in reports directly to users through their pagers. This is a must feature for anyone needing instant updates on the status of their system or for working parents wanting to confirm their children have arrived safely home from school.

The XR20 communicates in a half-duplex mode with a Glenayre alphanumeric pager terminal. The terminal modem must accept the following parameters:

- 300 bps Bell 103 protocol
- Carrier detect response time = 300ms
- Delay between lost carrier and hang-up = 12.0 seconds

**Access Control**

The XR20 also supports the 791 and 793 Easy Entry™ Keypads with built-in and external proximity or magnetic stripe access control readers. Users can enjoy the benefits of codeless arming and disarming of the system without compromising security.

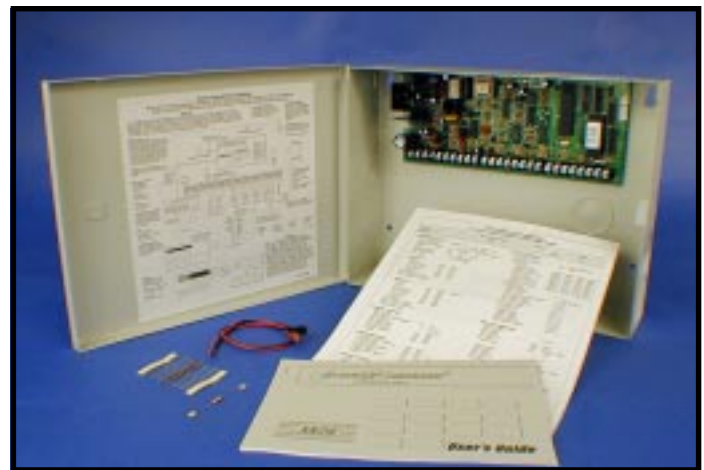

**System Features**

- Ten on-board zones
- One 2-wire smoke detector zone
- Expandable to 26 zones by adding hardwire or wireless expansion zones
- 1.5 Amp bell output
- 600mA auxiliary output, 100mA is switched smoke detector output
- 32 user codes with authority levels
- "Arm only", user code option
- Optional Ambush code
- Area, All/Perimeter, and Home/Sleep/Away modes
- Automatic arming and disarming
- Remote arm and disarm from any telephone
- Built-in clock adjustable from keypads
- Open/Close schedules with Closing Check
- Built-in English text programming from any keypad
- Remote program/download with Remote Link™
- Supports 791 keypads and proximity or magnetic readers
- Supports 793 keypads with built-in proximity reader
- Four outputs for annunciation and control applications
- Compatible with Model 860 Relay Output Module
- Cross zoning between zones to reduce false alarms
- Individual zone options for instant, delay, priority, fire, fire verification, panic, swinger bypass, cross zoning, and fire supervisory
- 16-character zone and area names
- Review up to 100 event history displays from keypad
- Alternate reporting to 2 central station receivers
- SDLC digital dialer, 4-2, CID, and Modem IIe reporting
- Secure-Com™ Cellular communication
- Pager Direct™ reporting to customers' pagers
- Up to 60-second Transmit Delay to reduce false alarms
- Abort reports to reduce false alarms
- Zone Activity Check monitors people living alone
- Armed Activity Check monitors number of days since user has armed or disarmed system
- System test by user
- Four separate Areas



## Cross Zoning

This powerful, false alarm reduction feature allows multiple zones to be cross zoned and report alarms only when two or more are faulted within a programmable time of 1 to 250 seconds. Should just one zone trip, only a zone fault report is sent to the central station.

## Event Memory

The XR20 logs up to 100 user and system events in memory that you can view at any time through a keypad User Menu option. The Display Events feature allows users to view stored openings and closings, zone events, user code changes, and supervisory events.

## Annunciator Outputs

The XR20 provides four open collector outputs that can be used for a variety of remote control and annunciation applications. Each output is rated for 50mA maximum. Add the Model 860 Relay Output module to provide four form C relay contacts. Each Model 305 relay is rated at 42mA and the module can easily mount inside the XR20 enclosure.

## Security Command® Keypads

The XR20 allows you to connect any number of alphanumeric and LED keypads to the panel with the ability to supervise up to four alphanumeric Security Command keypads.

## User Codes

You can program up to 32 user codes in the XR20 panel and assign either a Standard or Master authority level to control each user's level of access to the system. User code number one can also be programmed as a special Ambush code that sends a silent alarm when entered at a Security Command keypad.

## Panic Button Keypads

The XR20 panel also supports the DMP Security Command keypads with 2-button panic keys. These alphanumeric keypads allow users to send Police, Emergency, or Fire reports to the central station just by pressing two clearly labeled keypad buttons.

## Remote Programming

You can remote program XR20 panels using Remote Link™ or Remote Access™ programming software from DMP. You can upload panel programming, make the necessary programming changes, and then download the revised programming into the panel.

## Built-in Programmer

The XR20 contains an internal English text Programmer that allows installers and service technicians to easily program and test the panel from any keypad. A special lockout code restricts access to only authorized persons.

## Listings and Approvals

- CSFM - 7167-1157:103
- UL - S5392
  - UL365 Police Connected Burglar
  - UL609 Local Burglar
  - UL985 Household Fire Warning
  - UL1023 Household Burglar
  - UL1076 Proprietary Burglar
  - UL1610 Central Station Burglar
  - UL1635 Digital Burglar

## Panel Specifications

Primary Power	16.5 VAC 40VA transformer (Model 320)
Secondary Power	12 VDC 7.0 Ah battery (Model 367)
Auxiliary Output	500mA at 12 VDC
Alarm Output	1.5 Amps at 12 VDC
Smoke Output	100mA at 12 VDC
Annunciator Outputs (4)	50mA each (switched ground)
Dimensions (XR20)	12.5" x 9.5" x 2.75"
Dimensions (XR20M)	12.25" x 11.75" x 3.125"
Enclosure	20 gauge cold rolled steel

## Security Command® Keypads

Model	Description
690	32-char. LCD keypad
692	10-zone LED keypad, Panic keys
770	16-char. fluorescent display keypad, 4 zones
771	16-char. fluorescent keypad, 4 zones, door relay
790	32-char. LCD, 4 zones
791	32-char. LCD, 4 zones, door relay, Wiegand input
793	32-char. LCD, integral prox reader, 4 zones, door relay

## Panel Accessories

Model	Description
300	Plug-in open collector output harness
320	16.5 VAC 40VA wire-in transformer
321	16.5 VAC 40VA plug-in transformer
350A	Optional Attack Resistant 18 gauge enclosure
367	12 VDC 7.0 Ah battery
370RJ	Lightning Suppressor with dual RJ jacks
FA426	900 MHz Wireless Receiver
714	Zone Expander (4) Class B zones
714-8/16	Zone Expander (8 or 16) Class B zones
715	Zone Expander (4) 2-wire smoke detectors
715-8/16	Zone Expander (8 or 16) 2-wire smoke detectors
733	Wiegand Interface Module
736P	Radionics Popit Interface Module
738A	Ademco Interface Module
860	Relay Output Expander for use with 305 Relays
MP-5365	Narrow style proximity reader for door mullions
PP-6005	Compact proximity reader for or door mullions
PR-5355	Single gang mounting proximity reader
TL-5395	Switch plate mounting proximity reader
VP-6100	Veriprox fingerprint reader
1306P	Prox Patch, small adhesive proximity device
1326	Credit card size, flexible proximity device
1346	Tough, plastic key chain proximity device
1386	ISOprox II, photo proximity device
570	Easy Entry RF series receiver
571	Easy Entry LED plate
575	Easy Entry RF series key ring transmitter
SLR-835B	Hochiki 8-35 VDC photoelectric smoke detector

## Digital Monitoring Products

2500 N. Partnership Boulevard Springfield, MO 65803 800-641-4282